

# Lifting column

# **X-series**

X13

Max 2.000 N



#### **Description**

The X13-column is the most robust column in the industry. It is extremely stable with offset loads and suits demanding applications. The DX13-models enables long strokes with short retracted lengths. With its extremely stiff aluminum tubes and long-life pads, it offers a stable and reliable guiding system that is maintenance free.



Long lifetime

Features

**Options** 

Extreme offset capacity

Push Build in Hall Sensors Cable out large tube Limit switch Potentiometer
Cable through
Cable out small tube
Customizable top/bottom plates

Extremely robust

#### **Technical data**


	DX-SJ13	DX-SI13	DX-SH13	DX-EJ13	DX-EI13	DX-SG13	DX-EH13
Force, max push*	1.000 N	1.400 N	1.500 N		1.800 N	2.000 N	
Self-locking force**	1.000 N	1.400 N	1.500 N		1.800 N	2.000 N	
Speed @max load	31 mm/s	23 mm/s	18 mm/s	48 mm/s	36 mm/s	10 mm/s	28 mm/s
Stroke, S (longer strokes on request)	1.000 mm						
Retracted length, R***	R = S / 2 + 175  mm						
Duty cycle [%]	10% (1 min ON / 9 min OFF)						
Voltage	24 VDC						
Ambient temp	+10°C to +40°C						
Current @max load	5,5 A			10 A		5 A	10 A
IP Class	IP 30						
Safety factor Static centric load @ max stroke & load*	5	3,5	3,2	25		2,5	

<sup>\*</sup> See diagrams on page 3

<sup>\*\*</sup> Only applied when connected by short circuit

<sup>\*\*\*</sup> Longer retracted length enables more offset load, see diagrams on page 3

## **Technical drawing**

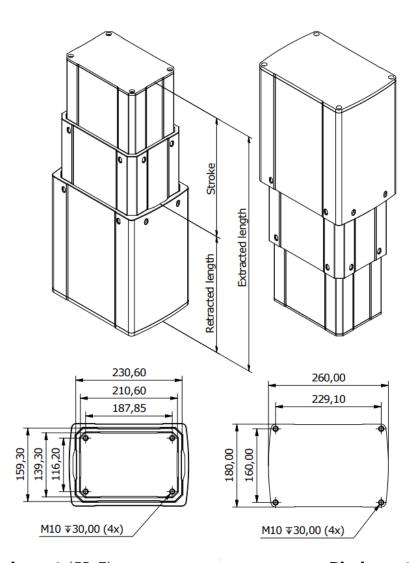

## **Pin layout** (SB-E)



6 pin 172160-1 Male

#### **Connectors**

	Description	Colour
1.	Motor -	Black
2.	Motor +	Blue
3.	Hall sensor +5V,	Red
4.	Hall sensor output 2	Violet
5.	Hall sensor -	Black
6.	Hall sensor output 1	Green


## **Pin layout** (SB-S)





8 pin JS-1149-08 Male

#### **Connectors**

	Description	Colour		
1.	Hall sensor 1	White		
2.	+5V	Red		
3.	Limit switch 2	-		
4.	Motor+	Green (motor: White)		
5.	Hall sensor 2	Blue		
6.	Limit switch 1	-		
7.	GND	Black		
8.	Motor-	Yellow		

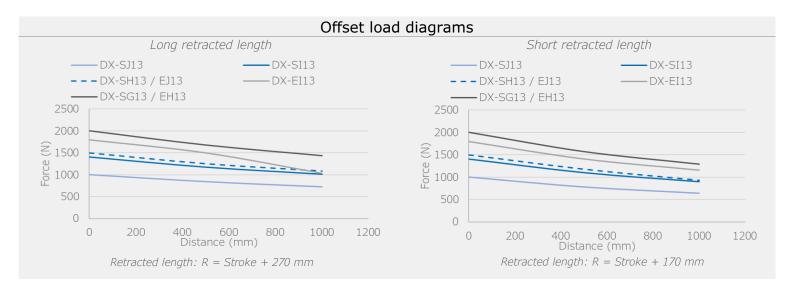

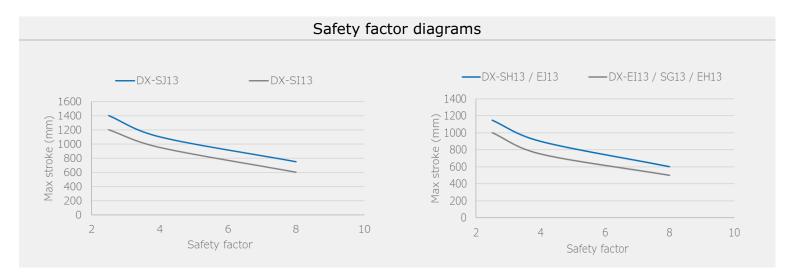


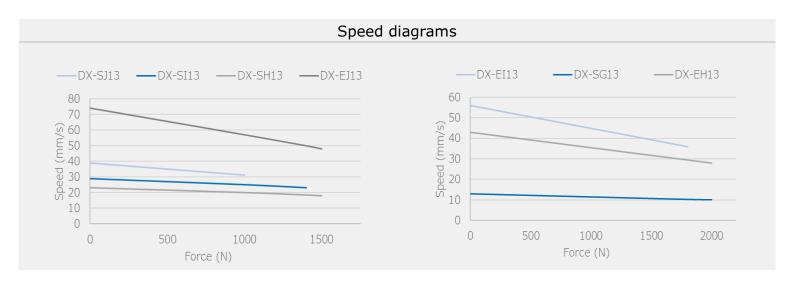

# X2 Technology – The Customizer

Before use of products, see general terms & conditions and operating manuals. Lifetime and suitability are depending on application and must therefore be tested by each user. Specifications subject to change without prior notice. All components in this datasheet are property of X2 Technology and may therefore not be used without permission.

Copyright © X2 Technology 2021.06.

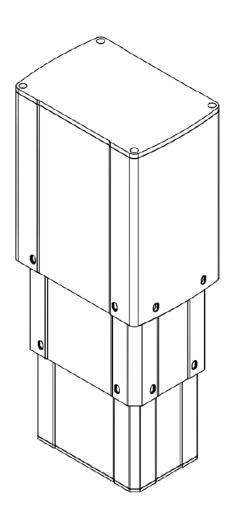

#### **Phoenix Mecano AB**



+46 470 717950



info@x2technology.se



www.x2technology.se

